

Configuration of Backup Image


1. Configuration of AutoSwitching for Screens #1,2,3,4
2. Configuration of BackUP image for Screens #1,2,3,4,5
3. Configuration of ON/OFF Timer for Screens #1,2,3,4
4. How to Turn on/off console mode

Step 1 Configuration of AutoSwitching for Screens #1,2,3,4

Objective of Auto switching:We will configure step by step the selection of the primary source(HDMI,PC(VGA), Magicinfo) that we want to display on the screen and the secondary source to be displayed if the primary source is not available like a cable disconnected for example.

Note: If you have a second PC for screen 5, you need to do the same steps as follow for screen 5.

1. Press **Menu** Button on remote control
2. On 6th tab, Select "**System**" using down arrow. Press **Enter** button
3. Go to 4th option named "**Auto Source Switching**" using down arrow and press **Enter**.

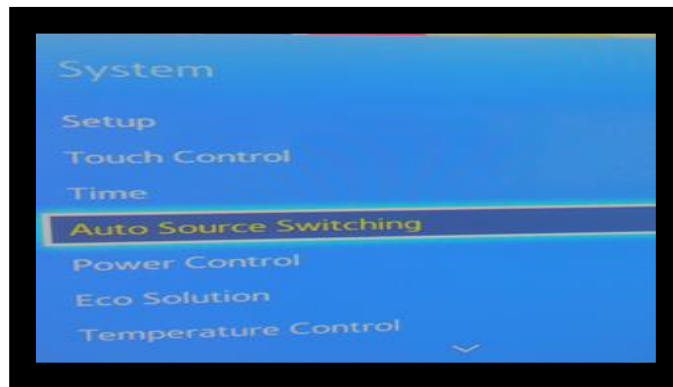

4. Select **On** with on down arrow. Press **enter**.



5. Go down with down arrow to 3rd option named "**Primary source**" and Press **Enter**.
Note: Set it to "**PC**" or "**HDMI**" instead of "**ALL**". (PC is 3rd option). (depending on the cable use, if it's Pc option it's for a vga cabling) instead of "**ALL**".
Press **Enter**.
6. Press down arrow to go to "**Secondary source**". Press **Enter**.
7. Press **UP arrow** for last option. (**MagicInfo Player S**). Press **Enter**.
8. Use **Up arrow** to go to 2nd option named "**Primary Recovery Source**"
Press **Enter**.
9. Press **Down arrow** to set it to **ON** then press **Enter**.
10. Press **EXIT** button of remote control

Step 2 Configuration of BackUP image for Screens #1,2,3,4,5

Objective: is to upload your backup images from a USB stick to the internal hard drive of your tv, this will allow you to configure the backup images.

1. Connect each screen on the computer with the proper cable ex.(HDMI or VGA) cables and **turn PC on.** (except screen 5)

2. Plug **USB KEY** in TV (Player content will open automatically within few seconds)

!!!Note: if content do not open automatically, you need to press "**home/content**" button and you should see the internal player menu (Player / Schedule / Template).

-if the default Samsung player starts to play default content (black background with square moving) and you don't see this menu, files and folders then press "return" button on remote control

You should see the player menu again and try to select "**Schedule**" option, press **enter**

-if you would see a popup message says this function is not available because console mode is on. You would need to follow steps at section "**Step 4. How to turn on/off console mode(optional)**"

3. Select **Player** and then press **Enter**, you should see folders and files browser

Note: if you still don't see the player menu Press **exit** and do "**Step 2. Configuration of BackUP image for Screens #1,2,3,4,5**" again.

4. Press **Up arrow**. Then 3 times Right arrow to go to "**Option**". Press **Enter**.

5. Press **Down arrow** and choose "**send**". Press **Enter**.

6. Choose good picture using arrow.

Note: For most Left TV – Screen1.jpg, for 2nd tv from left – Screen2.jpg, 3rd tv from left – Screen3.jpg, 4th tv from left – Screen4.jpg, for 5th tv from left – Screen5.jpg

7. Press **Enter** (will see check box checked on selected file).

8. Go to "**send**" button using **UP arrow**. Press **Enter**.

9. Press **Enter** on popup to "**start**".

10. Press **Enter** to confirm success upload.


11. Remove **USB KEY**, the image is now on the internal drive of tv

12. After removing the USB stick you should see some folders in player, press return button on remote control to be at the menu Player/schedule/template.

13. Then Right arrow to go to "**Schedule**". Press **Enter**.

14. Channel one column will be Highlighted. Press **Enter**

“Add content Picture” frame will be highlighted

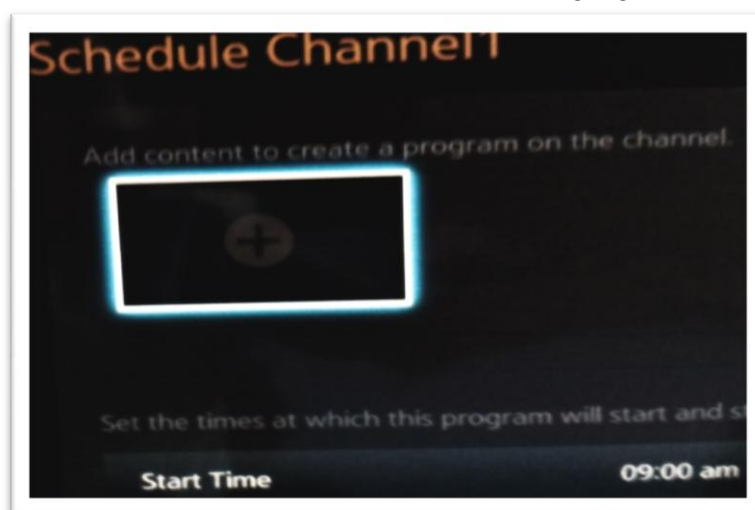

15. Press **Enter**. Choose your picture using arrows
16. Press **Enter**
17. Press **Done**
18. Press **Down arrow**
Note: (Ask manager to know what time store closes, and setup start time and end time)
19. Press **Down Arrow** Twice to select "**Save**". Press **Enter**.

Step 3 Configuration of ON/OFF Timer for Screens #1,2,3,4

Objective: Configure the timer ON/OFF option to setup a start time and end time to display on the screens as well as the number of days to be displayed. This is very useful because when it is setup the content will appear at the time that you started and will stop showing content at the end time specify.

Note: If you have a second PC for screen 5, you need to do the same "Step3" as follow for screen 5.

1. Press **Home(or Content)** button on remote
2. Select **ON/OFF Timer** at the bottom of screen and press **Enter**
3. Select **On Timer**, press **enter**
4. Select **ON Timer 1**, press **Enter**
5. Select "**Setup**" option press **Enter**, choose "**Everyday**", press **Enter**
6. Select "**Time**"
Note: ask manager what time store opens, and setup time 30min in advance(ex: Store opens at 9am, setup on time 8-30am)
7. Go down to **volume** option and set de volume to **(0)**(Setting the volume to (0) sets all sounds off)
8. Go down to **Source** and select **MagicInfo Player S**. Select **OK**, Press **Enter**
9. Press "Return" button and Select **OFF Timer**, press **Enter**
10. Select "**Setup**" option press **Enter**, choose "**Everyday**", press **Enter**
Select "**Time**"

Note: ask manager what time store opens, and setup time 30min in advance (ex: Store opens at 9am, setup on time 8-30am)

10. Select **OK**, press **Enter**
11. Press **Return** button **2 times**,
12. Select **Player**, press **Enter**
13. Select **Local Channel 1**, press **Enter**

*Note: You should see menu board picture starts to play. To continue Tv configuration press **Exit***

Step 4 How to turn off console mode (optional)

Objective: Turning console mode off. When trying to make a backup image on a USB stick, it might give an error that says that this function is not available, that's because of the console mode that's on.

1. Press "**Off**" red button 2 times (Tv should go OFF now)
2. Then take remote and point to infra-red detector (right bottom corner of tv) as close as possible (almost touching tv)
3. While holding the remote in such position, quickly press combination
4. Press **Mute** followed by **1, 8, 2, Power ON** button - in sequence
*!!Note: In next few seconds TV will turn on and you should see factory menu (TV left bottom side)
If you don't see this factory menu in next few seconds after TV is on you need to repeat same steps as in "**Step4 How to turn off console mode (optional)**" until you will see the factory menu.*
5. When Factory Menu is ON select "**control**" option and click **Enter**
6. Then select "**LFD**" option and click **Enter**
7. Then press "**Magicinfovideowall S**" press **Enter**
8. Then select **support console** and press **Enter**
9. Then press the **right arrow** to select **off**
10. Once the selection is made press **Enter**
11. Once it is done go back to step 1 in "**Step2 Configuration of BackUP image for Screens #1,2,3,4,5**" and continue to follow the steps